


Walraven VibraTek® MR-L 8000/M16 Rubber Levelling Mount

(L20527)

rubber mount with M16 connection for equipment isolation and levelling

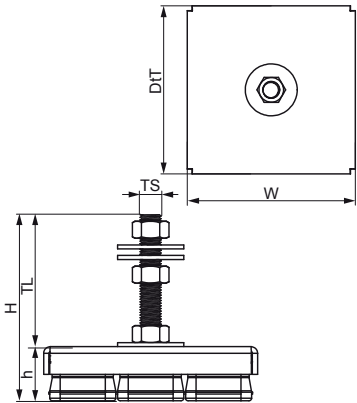

Features & benefits

- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
- simple to install and does not need to be fixed to the supporting structure
- rubber isolator with DIN 934 nuts and DIN 9012 washers included in delivery for mounting and levelling equipment
- metal and rubber parts can be separated for recycling
- hardness 45 Shore A
- working temperature range -20 °C till 90 °C

Productnumber	Thread Size	Total Height	Total Width	Total Depth	Height	Thread Length	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference Letter	TS	H	W	DtT	h	TL			
Unit description		mm	mm	mm	mm	mm	N	N	mm
2800108000	M16	141	162	162	41	100	1,000	7,500	7.5