


## Walraven VibraTek® MR-B Rubber Mount

(L20530)

bell-shaped elastomer isolator for isolation of equipment and machinery

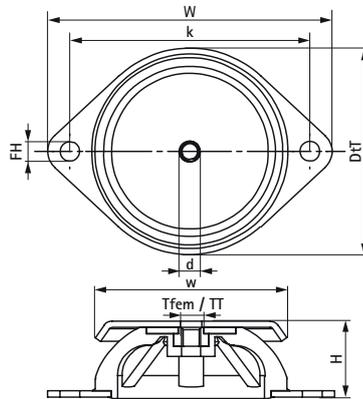

### Features & benefits

- recommended for machinery with working speeds above 2500 rpm, providing a degree of vibration insulation from 75% to 80%
- ideally suited for machinery with radial vibration (as opposed to axial) and prone to sudden or pronounced starts and stops
- metal and rubber parts can be separated for recycling
- working temperature range -30 °C till 80 °C

| Product Number   | Female Thread | Thread Type | Total Height | Total Width | Total Depth | Width | Fixing Hole | Heart To Heart Distance | Recommended Minimum Load Faz | Recommended Maximum Load Faz | Maximum Static Deflection |
|------------------|---------------|-------------|--------------|-------------|-------------|-------|-------------|-------------------------|------------------------------|------------------------------|---------------------------|
| Reference letter | Tfem          | TT          | H            | W           | DtT         | w     | FH          | k                       | N                            | N                            | mm                        |
| Unit description |               |             | mm           | mm          | mm          | mm    | mm          | mm                      |                              |                              |                           |
| 2801800240       | M6            | Metric      | 24           | 90          | 66          | 60    | 6.2         | 76                      | 50                           | 225                          | 3.5                       |
| 2801800750       | M8            | Metric      | 27           | 120         | 86          | 80    | 8.2         | 100                     | 130                          | 700                          | 4                         |
| 2801801500       | M10           | Metric      | 28           | 148         | 106         | 100   | 10.2        | 124                     | 150                          | 1,400                        | 5.5                       |