


Walraven VibraTek® HS-1X Spring Hanger

(L20542)

high performance spring isolator for medium to heavy machinery

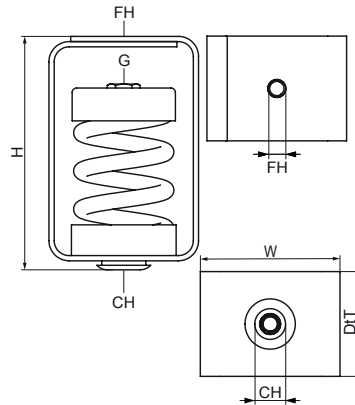

Features & benefits

- simple to install and does not need to be fixed to the base material
- recommended for machinery with low working speeds above 700 rpm
- epoxy powder-coated housing, cap and spring provide increased resistance to corrosion
- rubber spring base cup prevents contact between housing and the spring
- working temperature range -90 °C till 150 °C

Productnumber	Connection Thread	Total Height	Total Width	Total Depth	Fixing Hole	Connection Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference Letter	G	H	W	DtT	FH	CH			
Unit description		mm	mm	mm	mm	mm	N	N	mm
2800701000	M12	156	100	75	13	22	200	900	25
2800701250	M12	156	100	75	13	22	250	1,150	25
2800701500	M12	156	100	75	13	22	300	1,380	25
2800702000	M12	156	100	75	13	22	400	1,840	25
2800703000	M12	156	100	75	13	22	600	2,760	25
2800704000	M12	156	100	75	13	22	800	3,680	25
2800705000	M12	156	100	75	13	22	1,000	4,600	25
2800706000	M12	156	100	75	13	22	1,200	5,400	25