


# Walraven VibraTek® SA-2 Silent Absorber

(L20551)

silent rubber absorber for isolating metal to metal contact

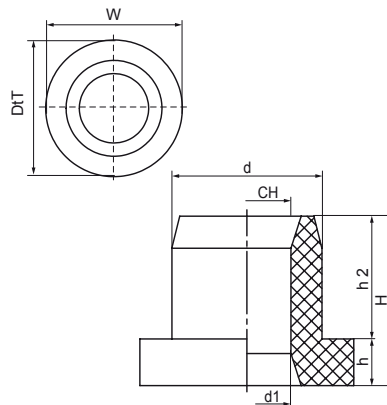

## Features & benefits

- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- with Ø 14mm hole for use with M10 and M12 threaded rods
- prevents transmission of vibration and noise
- working temperature range -10 °C till 45 °C

| Productnumber    | Total Height | Total Width | Total Depth | Height | Height 2 | Connection Hole | Diameter | Recommended Minimum Load Faz | Recommended Maximum Load Faz | Maximum Static Deflection |
|------------------|--------------|-------------|-------------|--------|----------|-----------------|----------|------------------------------|------------------------------|---------------------------|
| Reference Letter | H            | W           | DtT         | h      | h 2      | CH              | d        |                              |                              |                           |
| Unit description | mm           | mm          | mm          | mm     | mm       | mm              | mm       | N                            | N                            | mm                        |
| 2801000300       | 27           | 34          | 34          | 7.3    | 19.2     | 14              | 12.5     | 10                           | 250                          | 3                         |