


## Walraven Clamp HD1701 SSt A4 EPDM M10

(M0530)

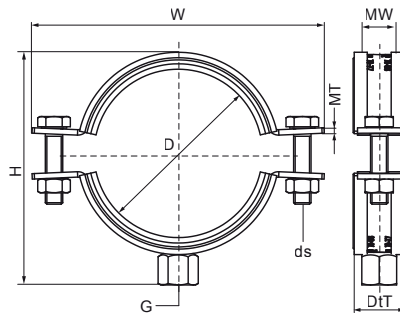

### Features & benefits

- two-part clamp with two locking bolts
- heavy design
- with CO<sub>2</sub> welded connection nut
- material: stainless steel 1.4404 (2B) - EN 10088, AISI 316L
- noise insulating lining, EPDM rubber, black
- with sound insulating lining (acc. DIN 4109), age resistant, for temperatures -30 °C up to +110 °C

| Productnumber    | Outside Pipe Diameter | DN     | Connection Thread | Total Height | Total Width | Total Depth | Material Thickness | Material Width | Screw Size | Maximum Allowed Load Faz |
|------------------|-----------------------|--------|-------------------|--------------|-------------|-------------|--------------------|----------------|------------|--------------------------|
| Reference Letter | D                     | DN     | G                 | H            | W           | DtT         | MT                 | MW             | ds         | F <sub>0,z</sub>         |
| Unit description | mm                    |        |                   | mm           | mm          | mm          | mm                 | mm             |            | N                        |
| 33174077         | 70 - 77               | DN 65  | M10               | 106          | 135         | 24          | 2.50               | 20             | M8         | 1,250                    |
| 33174086         | 78 - 86               |        | M10               | 115          | 144         | 24          | 2.50               | 20             | M8         | 1,250                    |
| 33174095         | 87 - 95               | DN 80  | M10               | 125          | 153         | 24          | 2.50               | 20             | M8         | 1,250                    |
| 33174109         | 101 - 109             |        | M10               | 139          | 166         | 31          | 2.50               | 25             | M8         | 2,000                    |
| 33174117         | 110 - 117             | DN 100 | M10               | 147          | 174         | 31          | 2.50               | 25             | M8         | 2,000                    |
| 33174129         | 122 - 129             |        | M10               | 159          | 186         | 31          | 2.50               | 25             | M8         | 2,000                    |
| 33174137         | 130 - 137             |        | M10               | 167          | 194         | 31          | 2.50               | 25             | M8         | 2,000                    |
| 33174145         | 138 - 145             | DN 125 | M10               | 177          | 204         | 31          | 2.50               | 25             | M8         | 2,000                    |
| 33174154         | 146 - 154             |        | M10               | 185          | 215         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174162         | 155 - 162             |        | M10               | 193          | 223         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174170         | 163 - 170             | DN 150 | M10               | 201          | 231         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174178         | 171 - 178             |        | M10               | 209          | 239         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174186         | 179 - 186             |        | M10               | 218          | 248         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174195         | 187 - 195             |        | M10               | 226          | 256         | 36          | 3.00               | 30             | M8         | 3,300                    |
| 33174203         | 196 - 203             |        | M10               | 234          | 264         | 36          | 3.00               | 30             | M8         | 3,300                    |