


Walraven Bifix® 300 Stainless Steel (M8)

(M1005)

for stainless steel and plastic pipes

Features & benefits

- two-screw clamp
- with quick locking system
- material: stainless steel 1.4404 (AISI 316L)

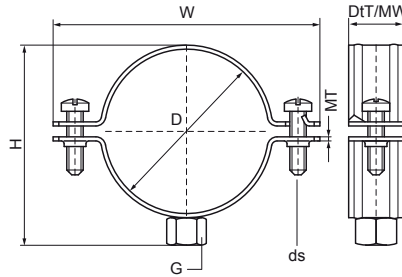

Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	F _{0,z}	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
3017017	15 - 19	DN 10	3/8	M8	31	56	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017022	20 - 22	DN 15	1/2	M8	33	58	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017030	25 - 28	DN 20	3/4	M8	39	64	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017034	31 - 35	DN 25	1	M8	47	72	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017042	40 - 43	DN 32	1 1/4	M8	54	80	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017051	47 - 51	DN 40	1 1/2	M8	62	87	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017060	54 - 60	-	-	M8	71	96	20	1.25	20	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017076	72 - 76	-	-	M8	86	109	20	2.00	20	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3017089	85 - 89	DN 80	3	M8	101	124	20	2.00	20	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3017118	110 - 118	DN 100	4	M8	131	154	20	2.50	20	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD