


Walraven RapidStrut® Stainless Steel channel Double

(M4510)

double profile for adapting on both sides of the cantilever

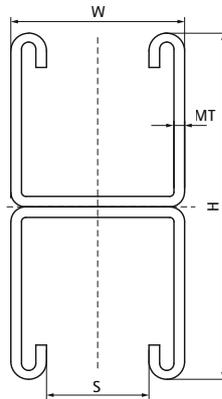

Features & benefits

- universal channel system
- double sided back on back channel with continuous perforation
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



| Product Number | Type | Total Height | Total Width | Total Length | Material Thickness | Profile Opening |
|-------------------------|-----------|--------------|-------------|--------------|--------------------|-----------------|
| <i>Reference letter</i> | | <i>H</i> | <i>W</i> | <i>L</i> | <i>MT</i> | <i>S</i> |
| <i>Unit description</i> | | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> |
| 6507646 | 41x82x2,5 | 82 | 41 | 6,000 | 2,50 | 22 |