
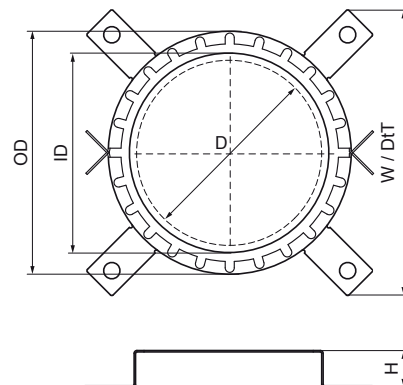


Walraven Pacifyre® AWM III Fire Collar

(U0435)

Standard collar with low collar height for plastic pipes



Features & benefits

- Two-part fire collar designed for easy installation
- Zero distance is possible between fire collars
- With a fire resistance up to EI 120 U/C
- Low collar height, allowing building of bends, sockets and T-joints close to the wall or ceiling
- Should be fixed on both sides of the wall / ceiling
- Tested according to EN 1366-3



Productnumber	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference Letter	D	ID	OD	H	W	DtT	
Unit description	mm	mm	mm	mm	mm	mm	
2135032034	32	38	47	26	87	87	2
2135040042	40	46	55	26	95	95	2
2135050052	50	56	65	26	105	105	2
2135063065	63	69	82	26	122	122	4
2135075077	75	81	94	26	134	134	4
2135090092	90	86	114	26	154	154	4
2135110112	110	116	134	26	174	174	4
2135125125	125	132	150	40	150	150	4
2135140140	140	144	168	40	168	168	4
2135160160	160	164	188	40	188	188	4