


Walraven Pacifyre® MLAR Strip

(U0445)

For use according to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Erleichterungen"

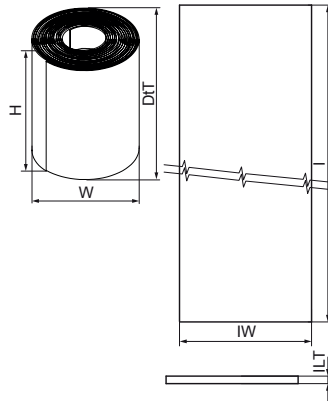

Features & benefits

- For sealing pipe and cable penetrations in walls and ceilings
- Installation of connectors for cast iron pipes in walls and ceilings possible
- Many partitions with just one role
- Non-combustible pipes up to a maximum pipe outside diameter of 160 mm
- Combustible pipes up to a maximum pipe outside diameter of 32 mm
- According to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Reliefs"
- Self-adhesive over the entire length
- Suitable for use in damp rooms
- Sound insulation tested: P-BA 243/2008 (Fraunhofer Institute for Building Physics (IBP))
- Quick, uncomplicated and space-saving assembly
- External monitoring by MPA Braunschweig
- Thanks to the width of 250 mm, insulation of all common ceiling thicknesses is possible

Productnumber	Length	Intumescent Width	Intumescent Layer Thickness	Total Height	Total Width	Total Depth
Reference Letter	I	IW	ILT	H	W	DtT
Unit description	mm	mm	mm	mm	mm	mm
2136250025	2,500	250	3	3	250	2,500