


Walraven Pacifyre® MLAR Strip

(U0445)

For use according to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Erleichterungen"

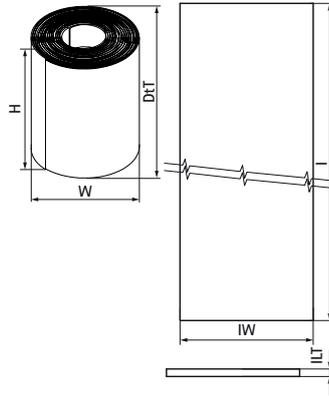

Features & benefits

- For sealing pipe and cable penetrations in walls and ceilings
- Installation of connectors for cast iron pipes in walls and ceilings possible
- Many partitions with just one role
- Non-combustible pipes up to a maximum pipe outside diameter of 160 mm
- Combustible pipes up to a maximum pipe outside diameter of 32 mm
- According to MLAR/LAR/RbALi, Section 4.2 or 4.3 "Reliefs"
- Self-adhesive over the entire length
- Suitable for use in damp rooms
- Sound insulation tested: P-BA 243/2008 (Fraunhofer Institute for Building Physics (IBP))
- Quick, uncomplicated and space-saving assembly
- External monitoring by MPA Braunschweig
- Thanks to the width of 250 mm, insulation of all common ceiling thicknesses is possible

Product Number	Length	Intumescent Width	Intumescent Layer Thickness	Total Height	Total Width	Total Depth
Reference letter	<i>l</i>	<i>IW</i>	<i>ILT</i>	<i>H</i>	<i>W</i>	<i>DtT</i>
Unit description	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
2136250025	2,500	250	3	3	250	2,500