


Walraven Pacifyre® DC Downlighter Cover

(U0470)

For fire stopping of downlighters and spot lights

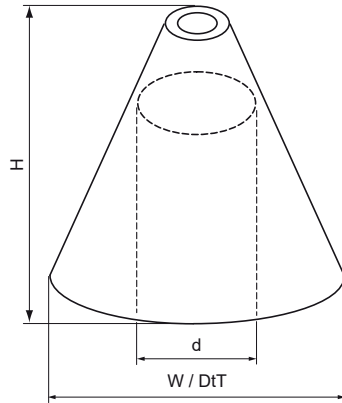

Features & benefits

- For fire stopping of downlighters and spot lights in fire rated suspended ceilings
- Suitable for 30 or 60 minutes fire resistant ceilings (NEN-EN 1364-2)
- Provides thermal and acoustic insulation
- Easily installed by one man to correct specification
- Maintenance free
- Fire resistant: 72 minutes. Test according BS476 Part 23:1987 and BS EN 1365-2:2000
- Airborne and impact sound insulation: test according to BS EN ISO 140 Part 3:1995 and BS EN ISO 140 part 6:1998 BRE Test report 213942
- Suspended ceiling: BS476 Part 23:1987. Duration of effective protection 72 minutes (no failure). Cert.No. FEI/F99029/Chiltern
- Suspended ceiling and timber, steel or concrete beam/joist protected by plasterboard. Assessment No. CHILT/A02105/Chiltern. Duration of effective protection 60 minutes
- Plasterboard ceilings: BS-EN 1365-2:2000. Integrity: 60 minutes (no failure). Insulation 60 minutes (no failure). Cert.No. TE94667/BRE

| Product Number | Diameter | Total Height | Total Width | Total Depth |
|------------------|-----------|--------------|-------------|-------------|
| Reference Letter | <i>d</i> | <i>H</i> | <i>W</i> | <i>DtT</i> |
| Unit description | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> |
| 2190150150 | 50 - 75 | 150 | 150 | 150 |
| 2190200200 | 75 - 100 | 200 | 200 | 200 |
| 2190300170 | 145 - 270 | 170 | 300 | 300 |