


Walraven W-HLX-P Concrete Screw

(L0350)

zinc flake coated concrete screw with a $\varnothing 14.6$ mm pan head and torx T30 drive

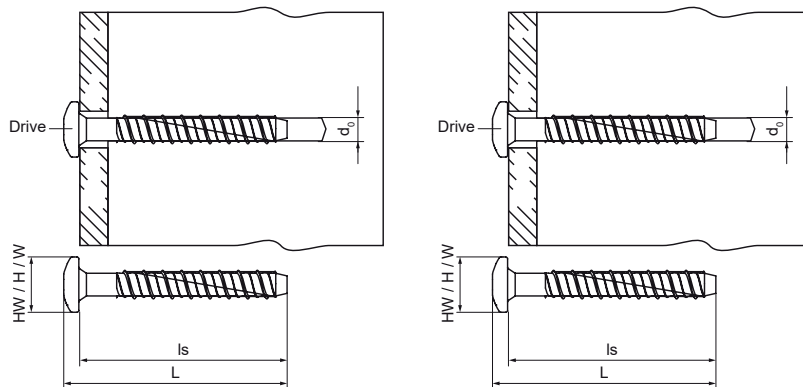

- induction hardened technology ensures very high load capacity
- the advanced thread geometry ensures fast and simple installation
- reduced minimum edge and anchor spacing distances for confined areas
- installation possible without drill hole cleaning for faster workflow on site
- suits installation with Walraven RapidRail® Light-Duty Channel
- European Technical Assessment according to EAD 330232-01-0601 (December 2019) for mechanical fastener for use in cracked and non-cracked concrete
- European Technical Assessment according to EAD 330747-00-0601 (May 2018) for fastener for use in concrete for redundant non-structural systems
- material: steel
- zinc flake coating
- fire resistance class R30-R120
- seismic performance category C1
- complies with VdS CEA 4001: 2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheets and/or the ETA reports

Product Number	Dim. Tassello	Dimensione cacciavite	Classe sismica ETA						
<i>Is</i>		<i>Drive</i>	<i>d0</i>	<i>HW</i>		<i>H</i>	<i>W</i>	<i>L</i>	
62511304	40	6	T30	6	15	C1	15	15	44