


Walraven W-HLX-PX Concrete Screw

(L0351)

zinc flake coated concrete screw with a ø17.0 mm large pan head and torx T30 drive

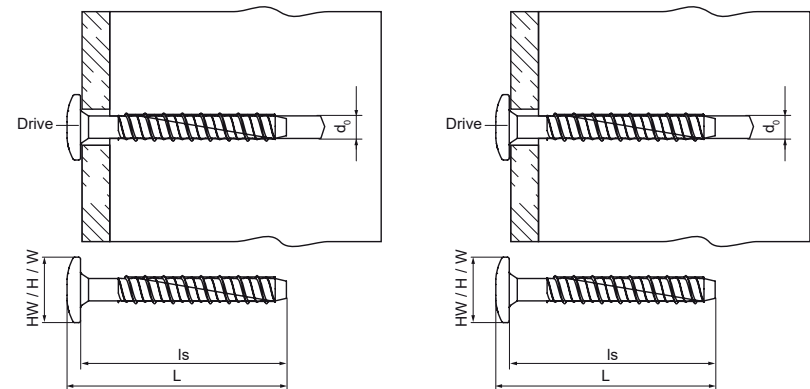

- induction hardened technology ensures very high load capacity
- the advanced thread geometry ensures fast and simple installation
- reduced minimum edge and anchor spacing distances for confined areas
- installation possible without drill hole cleaning for faster workflow on site
- suits installation with Walraven RapidStrut® Channel
- European Technical Assessment according to EAD 330232-01-0601 (December 2019) for mechanical fastener for use in cracked and non-cracked concrete
- European Technical Assessment according to EAD 330747-00-0601 (May 2018) for fastener for use in concrete for redundant non-structural systems
- material: steel
- zinc flake coating
- fire resistance class R30-R120
- seismic performance category C1
- complies with VdS CEA 4001: 2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheets and/or the ETA reports

Product Number	Dim. Tassello		Dimensione cacciavite	Classe sismica ETA					
	Is		Drive	d0	HW		H	W	L
62512304	40	6	T30	6	17	C1	17	17	44
62512306	60	6	T30	6	17	C1	17	17	64