


Walraven Heavy Duty Clamp HD500 (M8/10) (BUP1000)

(B1004)

for steel pipes

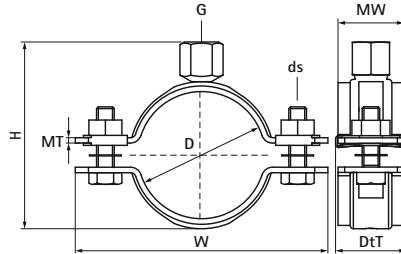

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- tested for fire safety



Product Number	RSK Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z	
Unit description			"		mm	mm	mm	mm	mm		N	
33038019	3808559	DN 10	3/8	M8/M10	46	75	32	30	2.50	M8	2,100	RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038023	3808504	DN 15	1/2	M8/M10	50	79	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038030	3808505	DN 20	3/4	M8/M10	57	85	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038036	3808506	DN 25	1	M8/M10	63	91	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038042	3808507			M8/M10	69	98	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038045	3808508	DN 32	1 1/4	M8/M10	72	102	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038052	3808509	DN 40	1 1/2	M8/M10	79	109	32	30	2.50	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038058	3808564			M8/M10	85	114	32	30	2.50	M8	2,100	RAL-GZ 656, VdS, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038065	3808510	DN 50	2	M8/M10	92	121	32	30	2.50	M8	2,100	RAL-GZ 656, VdS, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038071	3808565			M8/M10	98	129	32	30	2.50	M8	2,100	RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), CE, ETA, EPD