


## Walraven BISOFIX® PIR30

(D0360)

for insulated pipes

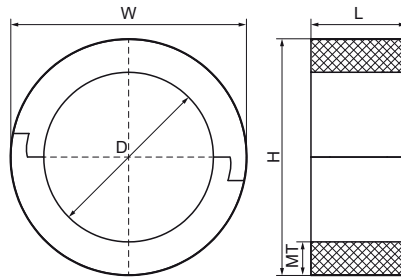

### Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for  $D < 110\text{mm}$  =  $80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm}$  =  $120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- temperature range  $-45\text{ °C} - +105\text{ °C}$



Product Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	H	W	L	MT	F <sub>a,z</sub>
Unit description		mm	mm	mm	mm	N
I300000114	DN 100	174	174	100	30.00	1,370
I300000089	DN 80	149	149	75	30.00	500
I300000076	DN 65	136	136	75	30.00	460
I300000064		124	124	75	30.00	420
I300000054		114	114	75	30.00	380
I300000048	DN 40	108	108	75	30.00	370
I300000042	DN 32	102	102	75	30.00	350
I300000034		95	95	75	30.00	320
I300000028	DN 20	88	88	75	30.00	300
I300000022	DN 15	82	82	75	30.00	230
I300000018	DN 10	78	78	75	30.00	190
I300000012		72	72	75	30.00	130
I300000015		75	75	75	30.00	170
I300000020		80	80	75	30.00	220
I300000025		85	85	75	30.00	260
I300000032		92	92	75	30.00	310
I300000040		100	100	75	30.00	340
I300000050		110	110	75	30.00	370
I300000057		117	117	75	30.00	390
I300000060	DN 50	120	120	75	30.00	410
I300000070		130	130	75	30.00	440
I300000102		162	162	75	30.00	550
I300000108		168	168	75	30.00	620
I300000133		193	193	100	30.00	1,520
I300000140	DN 125	200	200	100	30.00	1,570
I300000160		220	220	100	30.00	1,720
I300000168	DN 150	228	228	100	30.00	2,720
I300000219	DN 200	279	279	150	30.00	4,210
I300000273		333	333	150	30.00	5,020
I300000324		384	384	150	30.00	5,790