
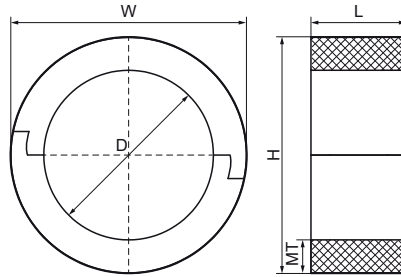


Walraven BISOFIX® PIR40

(D0370)

for insulated pipes



Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45 \text{ °C} - +105 \text{ °C}$



Product Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	H	W	L	MT	F _{a,z}
Unit description		mm	mm	mm	mm	N
I400000273		353	353	150	40.00	5,320
I400000219	DN 200	299	299	150	40.00	4,510
I400000168	DN 150	248	248	100	40.00	2,960
I400000140	DN 125	220	220	100	40.00	1,730
I400000012		92	92	75	40.00	300
I400000015		95	95	75	40.00	320
I400000018	DN 10	98	98	75	40.00	340
I400000020		100	100	75	40.00	340
I400000022	DN 15	102	102	75	40.00	350
I400000025		105	105	75	40.00	350
I400000028	DN 20	108	108	75	40.00	350
I400000032		112	112	75	40.00	370
I400000034		115	115	75	40.00	370
I400000040		120	120	75	40.00	400
I400000042	DN 32	122	122	75	40.00	410
I400000048	DN 40	128	128	75	40.00	430
I400000054		134	134	75	40.00	440
I400000057		137	137	75	40.00	460
I400000060	DN 50	140	140	75	40.00	470
I400000064		144	144	75	40.00	490
I400000070		150	150	75	40.00	510
I400000076	DN 65	156	156	75	40.00	530
I400000089	DN 80	169	169	75	40.00	620
I400000102		182	182	75	40.00	650
I400000108		188	188	75	40.00	690
I400000114	DN 100	194	194	100	40.00	1,530
I400000133		213	213	100	40.00	167
I400000160		240	240	100	40.00	2,850
I400000324		404	404	150	40.00	6,090
I400000406		486	486	150	40.00	6,150