


Walraven BISOFIX® PIR80

(D0396)

for insulated pipes

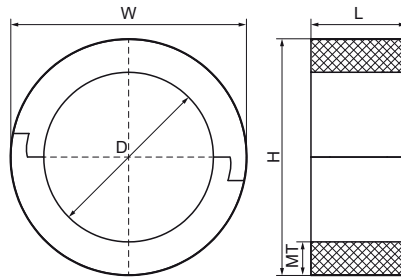

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm}$ = 80kg/m^3
- PIR density for $D > 110\text{mm}$ = 120kg/m^3
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$

Product Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	H	W	L	MT	Fa,z
Unit description		mm	mm	mm	mm	N
1800000089	DN 80	249	249	75	80.00	800
1800000100		260	260	75	80.00	820
1800000114	DN 100	274	274	75	80.00	1,860
1800000120		280	280	75	80.00	2,150