
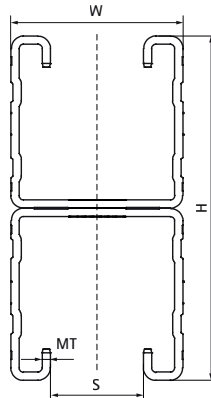


Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications

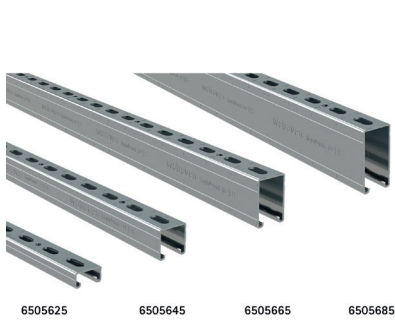

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	RSK Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
6505224	3820660	21 L	21	41	2,000	1.50	22
6505225	3820661	21 H	21	41	2,000	2.50	22
6505242	4125700	41 M	41	41	2,000	2.00	22
6505244	3820662	41 L	41	41	2,000	1.50	22
6505245	3820663	41 H	41	41	2,000	2.50	22
6505324	4436214	21 L	21	41	3,000	1.50	22
6505325	3820590	21 H	21	41	3,000	2.50	22
6505342	4125701	41 M	41	41	3,000	2.00	22
6505344	3820585	41 L	41	41	3,000	1.50	22
6505345	3806120	41 H	41	41	3,000	2.50	22
6505365	3820130	62 H	62	41	3,000	2.50	22
6505385		82 H	82	41	3,000	2.50	22
6505624	3820587	21 L	21	41	6,000	1.50	22
6505625	3820588	21 H	21	41	6,000	2.50	22
6505642	4125702	41 M	41	41	6,000	2.00	22
6505644	4436215	41 L	41	41	6,000	1.50	22
6505645	3820589	41 H	41	41	6,000	2.50	22
6505665	3805941	62 H	62	41	6,000	2.50	22
6505685	3805942	82 H	82	41	6,000	2.50	22
6505322	4125703	21 M	21	41	3,000	2.00	22
6505222	4125797	21 M	21	41	2,000	2.00	22
6505622		21 M	21	41	6,000	2.00	22