


Walraven RapidStrut® Connector 90° (BUP1000)

(H2813)

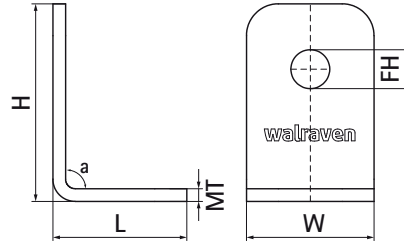

Features & benefits

- angle connector for all Walraven RapidStrut® rails to make fabrications
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- user friendly by rounded edges
- with reinforced bend for extra strength
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	RSK Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Fixing Hole	Heart To Heart Distance	Torque Moment For Installation
Reference letter			<i>a</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>FH</i>	<i>k</i>	<i>T_{inst}</i>
Unit description			°	mm	mm	mm	mm	mm	mm	Nm
66588201	4125785	41x21, 41x41, 41x51, 41x62, 41x82	90	62	40	62	4.00	12.2		30
66588207	4125784	41x21, 41x41, 41x51, 41x62, 41x82	90	62	40	42	4.00	12.2		30
66588221	4125752	41x21, 41x41, 41x51, 41x62, 41x82	90	110	40	62	4.00	12.2	50	30
66588228	4125753	41x21, 41x41, 41x51, 41x62, 41x82	90	110	40	110	4.00	12.2	50	30