

Walraven RapidStrut® Connector 90° / 2D (BUP1000)

(H2823)


for rigid angle connections



6659 8 914



6659 8 918

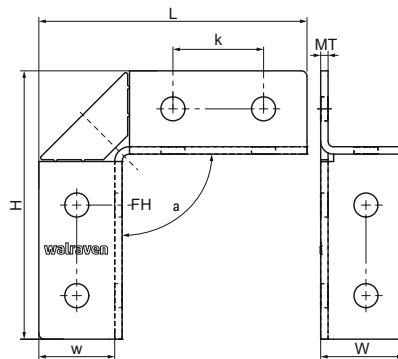

Features & benefits

- flexible connector allows different rail positioning
- strong connection by surrounding the rail
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	RSK Number	For Rail Type	Angle	Total Height	Total Width	Total Length	Material Thickness	Width	Fixing Hole	Heart To Heart Distance
<i>Reference letter</i>			<i>a</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>w</i>	<i>FH</i>	<i>k</i>
<i>Unit description</i>			°	mm	mm	mm	mm	mm	mm	mm
66598914	4125756	41x21, 41x41, 41x51, 41x62, 41x82	90	96	45	96	4.00	41	13	
66598918	4125763	41x21, 41x41, 41x51, 41x62, 41x82	90	145	45	145	4.00	41	13	49