


## Walraven VibraTek® MS-1 Spring Mount

(L20506)

high performance spring isolator for light equipment

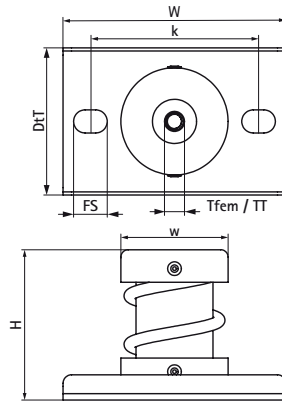

### Features & benefits

- recommended for equipment with low working speeds, from 700 rpm and above
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio  $K_x / K_z = K_y / K_z = 1.0$
- working temperature range  $-90\text{ °C}$  till  $150\text{ °C}$

Product Number	RSK Number	Female Thread	Thread Type	Total Height	Total Width	Total Depth	Width	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter		Tfem	TT	H	W	DtT	w	FS	k	N	N	mm
Unit description				mm	mm	mm	mm	mm	mm			
2800300050	8785009	M8	Metric	72	106	70	51	16x11	80	10	45	25
2800300150	8785010	M8	Metric	72	106	70	51	16x11	80	30	140	25
2800300250	8785011	M8	Metric	72	106	70	51	16x11	80	50	230	25
2800300500	8785012	M8	Metric	72	106	70	51	16x11	80	100	460	25
2800300750	8785013	M8	Metric	72	106	70	51	16x11	80	150	690	25
2800301000	8785014	M8	Metric	72	106	70	51	16x11	80	200	920	25