


Walraven VibraTek® MS-4 Spring Mount

(L20515)

High performance spring isolator for medium to heavy equipment

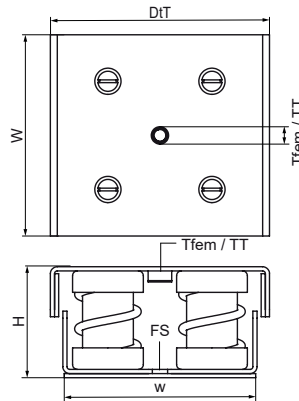

Features & benefits

- recommended for equipment with low working speeds, from 600 rpm and above
- flexible internal filler prevents debris and solid elements entering and damaging the spring under load
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio $K_x / K_z = K_y / K_z = 2.0$
- working temperature range -90 °C till 150 °C

Product Number	RSK Number	Female Thread	Thread Type	Total Height	Total Width	Total Depth	Width	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter		Tfer	TT	H	W	DtT	w	FS	k			
Unit description				mm	mm	mm	mm	mm	mm	N	N	mm
2800501000	8785022	M10	Metric	80	145	158	140	19x11	118	200	900	23
2800501500	8785023	M10	Metric	80	145	158	140	19x11	118	260	1,350	23
2800502000	8785024	M10	Metric	80	145	158	140	19x11	118	400	1,800	23
2800503000	8785025	M10	Metric	80	145	158	140	19x11	118	700	2,700	23
2800504000	8785026	M10	Metric	80	145	158	140	19x11	118	800	3,600	23
2800505000	8785027	M10	Metric	80	145	158	140	19x11	118	1,000	4,500	23