


Walraven VibraTek® HS-1X Spring Hanger

(L20542)

high performance spring isolator for medium to heavy machinery

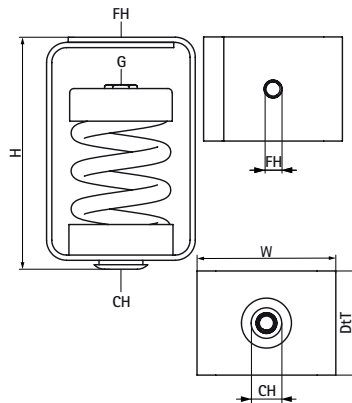

Features & benefits

- simple to install and does not need to be fixed to the base material
- recommended for machinery with low working speeds above 700 rpm
- epoxy powder-coated housing, cap and spring provide increased resistance to corrosion
- rubber spring base cup prevents contact between housing and the spring
- working temperature range -90 °C till 150 °C

Product Number	RSK Number	Connection Thread	Total Height	Total Width	Total Depth	Fixing Hole	Connection Hole	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter		G	H	W	DeT	FH	CH			
Unit description			mm	mm	mm	mm	mm	N	N	mm
2800701000	8785034	M12	156	100	75	13	22	100	920	25
2800701250	8785035	M12	156	100	75	13	22	130	1,150	25
2800701500	8785036	M12	156	100	75	13	22	150	1,380	25
2800702000	8785037	M12	156	100	75	13	22	200	1,840	25
2800703000	8785038	M12	156	100	75	13	22	300	2,760	25
2800704000	8785039	M12	156	100	75	13	22	400	3,680	25
2800705000	8785040	M12	156	100	75	13	22	500	4,600	25
2800706000	8785041	M12	156	100	75	13	22	600	5,520	25