

Walraven VibraTek® HR-1 Rubber Hanger

(L20545)


rubber hanger for isolation of suspended ventilation and AC systems



2800800300



2800800450

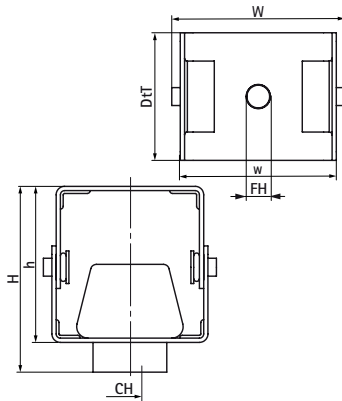

Features & benefits

- small footprint allows placement in compact spaces
- simple to install and adaptable to a sloping roof or ceiling, part of the metal housing swivels
- hardness 45 / 50 Shore A
- material: metal parts made of steel, rubber parts made of EPDM
- zinc plated
- working temperature range -20 °C till 90 °C

Product Number	RSK Number	Total Height	Total Width	Total Depth	Height	Width	Fixing Hole	Connection Hole	Colour	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference letter		H	W	DtT	h	w	FH	CH		N	N	mm
Unit description		mm	mm	mm	mm	mm	mm	mm				
2800800300	8785042	66	61	45	55	55	8.5	8	Zinc	5	250	3
2800800450	8785043	66	61	45	55	55	8.5	8	Zinc	10	400	3