


Walraven VibraTek® PR-T Rubber Tile Pad

(L20572)

a versatile rubber tile pad for general vibroacoustic isolation applications

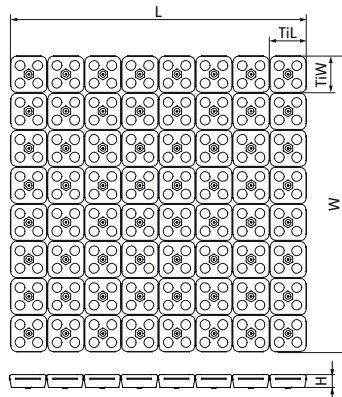

Features & benefits

- ideal for use as an elastic isolating support for equipment and metal structures
- individual 50x50mm pieces can be easily cut to form required support shape
- transforms to elastic base support when used with a M8 hexagon head screw
- reusable in the event of machine relocation
- simple to cut and install
- supplied as a mat of 64 blocks (8x8) joined by a membrane
- Hardness 45 Shore A
- see Product Data Sheet for further technical information
- Working temperature range -20 °C till 90 °C
- material: NR (natural rubber)

Product Number	RSK Number	Total Height	Total Width	Total Length	Tile Width	Tile Length
<i>Reference letter</i>		<i>H</i>	<i>W</i>	<i>L</i>	<i>TiW</i>	<i>TiL</i>
<i>Unit description</i>		<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
2801200400	8785048	18	411	411	50	50