


## Walraven RapidStrut® Stainless Steel channel

(M4505)

suspension and support

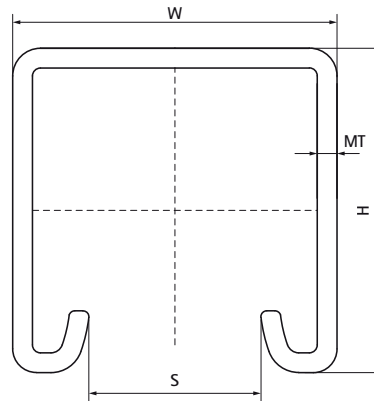

### Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- type 41x41x2,5 tested for fire safety according EN1363-1
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	RSK Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
<i>Reference letter</i>			<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
6507327	4125705	41x21x2,5	21	41	3,000	2.50	22
6507347	4125706	41x41x2,5	41	41	3,000	2.50	22
6507627	3820694	41x21x2,5	21	41	6,000	2.50	22
6507647	3820828	41x41x2,5	41	41	6,000	2.50	22