
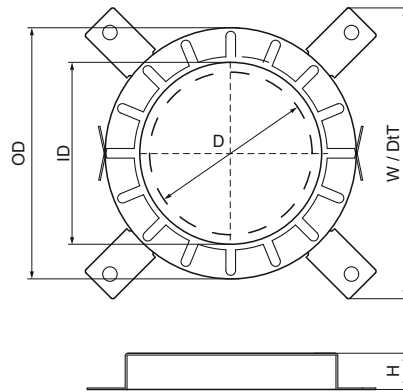


Walraven Pacifyre® AWM II+ Fire Collar

(U0430)

Innovative fire collar for complex installations of plastic and multi-layer pipes pipes



Features & benefits

- Zero distance is possible between fire collars
- Built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or flexible walls) and floors with fire protection
- Installation of elbows, pipe couplings or branch pipes into the wall or, directly in, or under the ceiling is possible
- With a fire resistance up to EI 120 U/U
- Installation of telecommunications pipeline or protective piping with up to 2 cables is possible
- The use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- Tested and approved according to EN 1366-3



| Product Number | Inner Diameter | Outer Diameter | Total Height | Total Width | Total Depth | Number Of Fixations Needed |
|------------------|----------------|----------------|--------------|-------------|-------------|----------------------------|
| Reference letter | ID | OD | H | W | DtT | |
| Unit description | mm | mm | mm | mm | mm | |
| 2134225225 | 239 | 328 | 100 | 500 | 510 | 10 |
| 2134250250 | 264 | 353 | 100 | 500 | 510 | 10 |
| 2134280280 | 289 | 378 | 100 | 500 | 510 | 12 |
| 2134355355 | 370 | 459 | 50 | 453 | 453 | 12 |
| 2134400400 | 415 | 504 | 50 | 503 | 503 | 12 |
| 2134075077 | 83 | 110 | 26 | 106 | 106 | 4 |
| 2134090092 | 100 | 138 | 26 | 132 | 132 | 4 |
| 2134110112 | 120 | 161 | 26 | 155 | 155 | 4 |
| 2134160160 | 169 | 225 | 40 | 220 | 220 | 6 |
| 2134180180 | 184 | 264 | 40 | 264 | 264 | 8 |
| 2134200200 | 204 | 684 | 40 | 284 | 284 | 8 |