


Walraven Pacifyre® AWM III Fire Collar

(U0435)

Standard collar with low collar height for plastic pipes

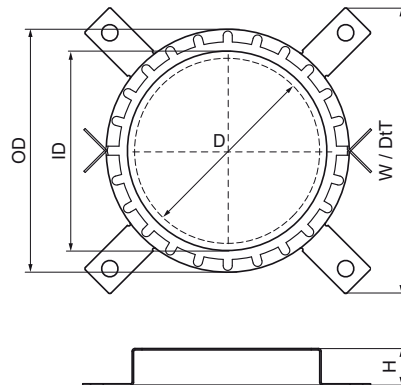

Features & benefits

- Two-part fire collar designed for easy installation
- Zero distance is possible between fire collars
- With a fire resistance up to EI 120 U/C
- Low collar height, allowing building of bends, sockets and T-joints close to the wall or ceiling
- Should be fixed on both sides of the wall / ceiling
- Tested according to EN 1366-3



Product Number	RSK Number	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference letter		ID	OD	H	W	DtT	
Unit description		mm	mm	mm	mm	mm	
2135032034	3833641	38	47	87	26	87	2
2135040042	3833642	46	55	95	26	95	2
2135050052	3833643	56	65	105	26	105	2
2135063065	3833644	69	82	122	26	122	4
2135075077	3833645	81	94	134	26	134	4
2135090092	3833646	86	114	154	26	154	4
2135110112	3833647	116	134	174	26	174	4
2135125125	3833824	132	150	40	150	150	4
2135140140	3833825	144	168	40	168	168	4
2135160160	3833648	164	188	40	188	188	4