


Walraven starQuick® Clamp (Grey) - Ø 71 - 115 mm

(C0507)

for securing conduits and pipes to walls, floors, or ceilings

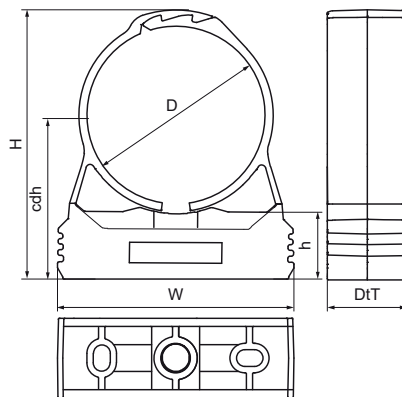

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe, use hands for full closing
- clamp can be mounted to wall, floor or ceiling by use of two bolts (outer slots) or by using a standard Walraven slide nut (middle hole) and screwing the clamp on a threaded rod
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Outside Pipe Diameter	Fixing Slot	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz
Reference Letter	D	FS	FH	H	W	DtT	cdh	h	G	Fa,z
Unit description	mm	mm	mm	mm	mm	mm	mm	mm		N
08541075	71 - 76	13x8,3	10.5	122	105	39	75	25.2	None	650
08541090	88 - 93	13x8,3	13	139	115	39	85	24.5	None	730
08541110	109 - 115	15x10,5	13	173	145	39	105	28.1	None	1,200