


Walraven BISOFIX® E32 (M16)

(D0514)

for insulated pipes

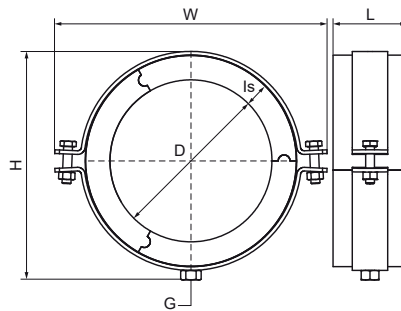

Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- excellent thermal and mechanical properties
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven HD500 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Product Number	Outside Pipe Diameter	Pipe Diameter Imperial	DN	Connection Thread	Total Height	Total Width	Total Length	Insulation Thickness	Maximum Allowed Load F _{a,z}
Reference Letter	D	D	D	G	H	W	L	Is	F _{a,z}
Unit description	mm	"			mm	mm	mm	mm	N
22115140	140	5	DN 125	M16	235	261	100	33.7	1,700
22115168	168	6	DN 150	M16	259	322	100	33	2,125
22115219	219	8	DN 200	M16	309	368	100	33.5	3,525
22115273	273	10	DN 250	M16	358	414	100	33	4,925