


## Walraven BISOFIX® PIR40 (40mm)

(D0615)

for insulated pipes

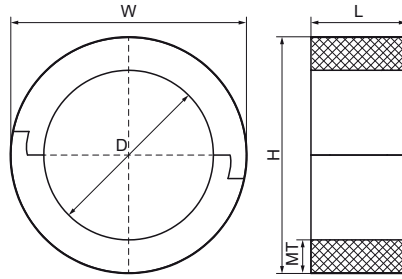

### Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for  $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30 \text{ W/(mK)}$
- temperature range  $-45 \text{ °C} - +105 \text{ °C}$

Product Number	Outside Pipe Diameter	Total Height	Total Width	Total Length	Material Thickness	Operating Temperature	Maximum Allowed Load Faz
Reference Letter	D	H	W	L	MT		Fa,z
Unit description	mm	mm	mm	mm	mm	CEL	N
I440000022	21.3	101	101	40	40.00	-45 - 105	350
I440000028	26.9	107	107	40	40.00	-45 - 105	350
I440000034	33.7	113	113	40	40.00	-45 - 105	370
I440000042	42.4	122	122	40	40.00	-45 - 105	410
I440000048	48.3	128	128	40	40.00	-45 - 105	430
I440000054	54	134	134	40	40.00	-45 - 105	440
I440000060	60.3	140	140	40	40.00	-45 - 105	470
I440000070	70	150	150	40	40.00	-45 - 105	510
I440000076	76.1	156	156	40	40.00	-45 - 105	530
I440000089	88.9	169	169	40	40.00	-45 - 105	620