


Walraven BISMAT® 2000 (M8/10) 2-screw

(A0524)

for steel, copper, cast iron and plastic (multilayer) pipe

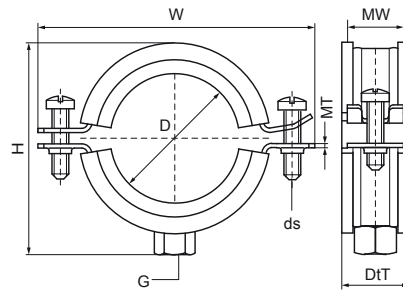

Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	F _{0,z}	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
3403064	57 - 64	DN 50	2	M8/M10	92	107	29	2.00	23	M6	520	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403070	64 - 70	-	-	M8/M10	100	115	29	2.00	23	M6	520	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403080	73 - 80	DN 65	2½	M8/M10	110	125	29	2.00	23	M6	520	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403091	83 - 91	DN 80	3	M8/M10	122	136	31	2.50	25	M6	935	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403105	100 - 105	-	-	M8/M10	137	151	31	2.50	25	M6	935	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403114	114	DN 100	4	M8/M10	145	159	31	2.50	25	M6	935	RAL-GZ 656, ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403119	116 - 119	-	-	M8/M10	150	164	31	2.50	25	M6	935	ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403125	122 - 125	-	-	M8/M10	158	172	31	2.50	25	M6	935	ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD
3403141	133 - 141	DN 125	5	M8/M10	172	187	31	2.50	25	M6	935	ITB (KOT), CE, ETA, ISO 3822-1, RAL-GZ 655/B, EPD