


## Walraven BISMAT® 2000 'S' (M8/M10) 2-screw

(A0536)

for steam pipes

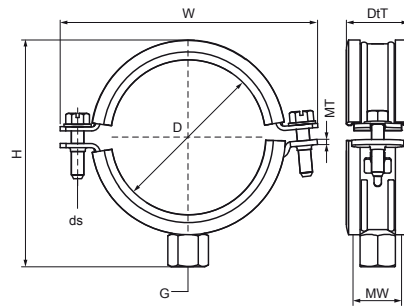

### Features & benefits

- two-screw clamp
- with Walraven BISMAT® quick locking system
- clamp easy to close with one hand
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- tested for fire safety
- heat resistant up to 210°C

## EPD

| Productnumber    | Outside Pipe Diameter | DN     | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Thickness | Material Width | Screw Size | Maximum Allowed Load Faz | Approvals      |
|------------------|-----------------------|--------|------------------------|-------------------|--------------|-------------|-------------|--------------------|----------------|------------|--------------------------|----------------|
| Reference Letter | D                     | DN     | D                      | G                 | H            | W           | DtT         | MT                 | MW             | ds         | F <sub>0,z</sub>         |                |
| Unit description | mm                    |        | in                     |                   | mm           | mm          | mm          | mm                 | mm             |            | N                        |                |
| 3404080          | 73 - 80               | DN 65  | 2½                     | M8/M10            | 109          | 126         | 30          | 2.00               | 23             | M6         | 930                      | ITB (KOT), EPD |
| 3404091          | 83 - 91               | DN 80  | 3                      | M8/M10            | 121          | 137         | 30          | 2.50               | 25             | M6         | 930                      | ITB (KOT), EPD |
| 3404114          | 108 - 114             | DN 100 | 4                      | M8/M10            | 141          | 160         | 30          | 2.50               | 25             | M6         | 930                      | ITB (KOT), EPD |
| 3404141          | 133 - 141             | DN 125 | 5                      | M8/M10            | 170          | 189         | 30          | 2.50               | 25             | M6         | 930                      | ITB (KOT), EPD |
| 3404168          | 159 - 168             | DN 150 | 6                      | M10               | 198          | 233         | 30          | 3.00               | 25             | M8         | 930                      | ITB (KOT), EPD |