


## Walraven starQuick® Clamp - M6 (Grey)

(C0515)

for securing conduits and pipes to walls, floors, or ceilings

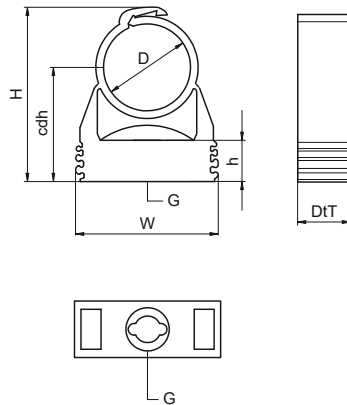

### Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- with pre-assembled connection nut M6
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Outside Pipe Diameter	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter	D	H	W	DtT	cdh	h	G	F <sub>a,z</sub>	F <sub>b,z</sub>
Unit description	mm	mm	mm	mm	mm	mm		N	N
0854615	14 - 16	40	29	17	25	10.6	M6	200	600
0854618	16 - 20	44	29	17	27	10.6	M6	230	700
0854622	20 - 23	48	29	17	28	10.6	M6	270	800
0854628	24 - 28	50	40	18	32	10.6	M6	280	850
0854631	28 - 32	61	40	17	36	10.6	M6	300	900
0854635	32 - 35	65	43	17	37	10.6	M6	330	1,000
0854638	35 - 40	74	47	17	44	12.1	M6	330	1,000
0854642	40 - 44	78	52	17	44	12.1	M6	330	1,000
0854654	48 - 55	91	63	17	50	12.1	M6	330	1,000
0854612	12 - 14	40	29	17	25	10.6	M6	180	550