


Walraven Fixpoint Console 'Heavy' (BUP1000)

(E0554)

for fixing point assembly

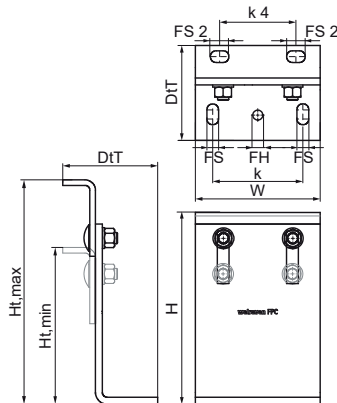

Features & benefits

- flexible use console module for high forces (depending on the situation, detailed design by technical service)
- can be used as a pipe connection point in conjunction with 2 heavy duty clamps type HD500 from 229 mm up to max. 564 mm
- tightening torque 120 Nm for the console fixing screws
- connection to the building is recommended with metal anchors M16
- infinitely adjustable height and inclination
- contact Walraven Technical Support for advice on safe loads
- material: steel 1.0332
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number | Minimum Height | Maximum Height | Maximum Allowed Load Faz | Maximum Allowed Load Fay | Maximum Allowed Load Fax | Fixing Slot | Fixing Hole | Heart To Heart Distance | Fixing Slot 2 | Heart To Heart Distance 4 | Total Width | Total Height | Total Depth |
|------------------|----------------|----------------|--------------------------|--------------------------|--------------------------|-------------|-------------|-------------------------|---------------|---------------------------|-------------|--------------|-------------|
| Reference Letter | Ht,min | Ht,max | Fa,z | Fa,y | Fa,x | FS | FH | k | FS 2 | k 4 | W | H | DtT |
| Unit description | mm | mm | N | N | N | mm | mm | mm | mm | mm | mm | mm | mm |
| 6698208 | 226 | 333 | 10,000 | 9,300 | 3,700 | 30x17 | 17 | 130 | 27x17 | 110 | 180 | 260 | 137 |