


Walraven Swivel Beam Clamp Model E

(K2025)

for clamping on beam flange

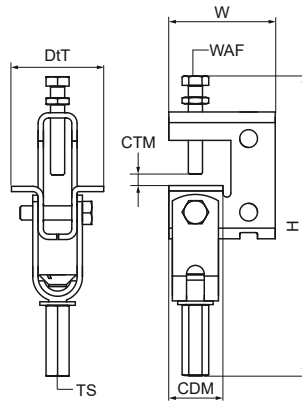

Features & benefits

- multidirectional clamp
- for suspension of light components to pitched beams without welding or drilling
- up to flange thickness 24 mm
- articulation to 30° sideways, 45° forwards
- material: steel
- surface treatment: zinc flake coated

Product Number	Maximum Clamping Thickness	Maximum Clamping Depth	Total Height	Total Width	Total Depth	Thread Size	Width Across Flats	Maximum Allowed Load Faz
<i>Reference Letter</i>	<i>CTM</i>	<i>CDM</i>	<i>H</i>	<i>W</i>	<i>D:tT</i>	<i>TS</i>	<i>WAF</i>	<i>F_{a,z}</i>
<i>Unit description</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>		<i>mm</i>	<i>N</i>
6076000	24	30	175	60	52	M10	13	2,800