


Walraven WDI1L Drop-in Anchor Lipped

(L0310)

standard drop-in anchor with a lip collar

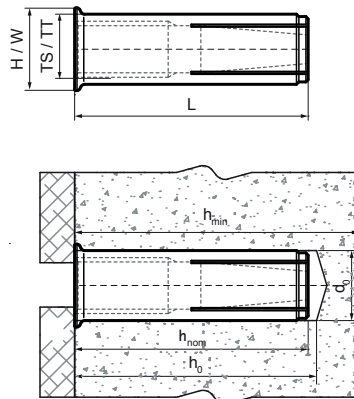

Features & benefits

- simple and quick installation procedure
- collar with a lip for flush anchor setting at any hole depth
- medium load capacity
- European Technical Assessment according to EAD 330747-00-0601 (May 2018) for fasteners for use in concrete for redundant non-structural systems.
- fire resistance class R30-R120 for design of anchorages under exposure to fire (M8-M16)
- complies with VdS CEA 4001:2024-01 (08) for applications with sprinkler systems in concrete (M8-M12)
- for loads and more information, refer to the product data sheet and/or the ETA report
- substrate type: cracked concrete, non-cracked concrete
- material: steel
- zinc plated

Productnumber	Thread Size	Thread Type	Total Height	Total Width	Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
Reference Letter	TS	TT	H	W	L	d0	h0 min	hnom	hmin
Unit description			mm	mm	mm	mm	mm	mm	mm
6103106	M6	Metric	8	8	25	8	30	≥ 25	80
6103110	M10	Metric	12	12	40	12	42	≥ 40	80
6103112	M12	Metric	15	15	50	15	53	≥ 50	100
6103116	M16	Metric	20	20	65	20	70	≥ 65	130