


Walraven VibraTek® MS-1 Spring Mount

(L20506)

high performance spring isolator for light equipment

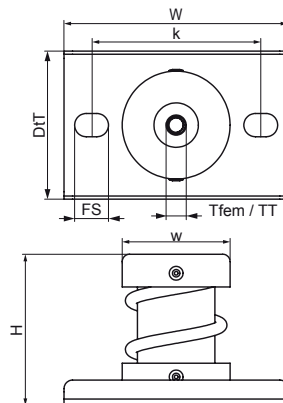

Features & benefits

- recommended for equipment with low working speeds, from 700 rpm and above
- ribs in the metal base provide increased stiffness
- slot holes facilitate positioning and anchoring to the base material
- epoxy powder-coated base, caps and springs provide increased resistance to corrosion
- average ratio $K_x / K_z = K_y / K_z = 1.0$
- working temperature range $-90\text{ }^{\circ}\text{C}$ till $150\text{ }^{\circ}\text{C}$

Productnumber	Female Thread	Thread Type	Total Height	Total Width	Total Depth	Width	Fixing Slot	Heart To Heart Distance	Recommended Minimum Load Faz	Recommended Maximum Load Faz	Maximum Static Deflection
Reference Letter	Tfem	TT	H	W	DtT	w	FS	k			
Unit description			mm	mm	mm	mm	mm	mm	N	N	mm
2800300050	M8	Metric	72	106	70	51	16x11	80	10	45	25
2800300150	M8	Metric	72	106	70	51	16x11	80	30	140	25
2800300250	M8	Metric	72	106	70	51	16x11	80	50	230	25
2800300500	M8	Metric	72	106	70	51	16x11	80	100	460	25
2800300750	M8	Metric	72	106	70	51	16x11	80	150	690	25
2800301000	M8	Metric	72	106	70	51	16x11	80	200	920	25