
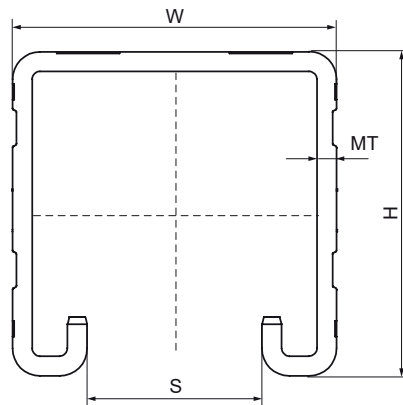


Walraven RapidStrut® Stainless Steel channel no slot

(M4506)

suspension and support



Features & benefits

- universal channel system
- inward formed flanges with serrated profile for extra grip
- material: stainless steel 1.4404 (AISI 316L)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
<i>Reference Letter</i>		<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>		<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
6507620	41x21x2.5	21	41	6,000	2.50	22