


## Walraven Twinlok® Test Plug

(P1605)

temperature, pressure and flow measurements

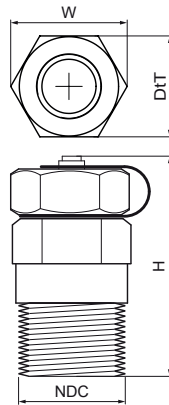

### Features & benefits

- for temperature, pressure and flow measurements
- 1/4" BSPT Thread
- max. pressure 500 P.S.I. (35 bar)
- EPDM core
- max. temperature 135 °C

Product Number	Nominal Diameter Connection	Material	Max. operating pressure at 20 °C	Total Height	Total Width	Total Depth
<i>Reference Letter</i>	<i>NDC</i>			<i>H</i>	<i>W</i>	<i>DtT</i>
<i>Unit description</i>			<i>bar</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
0634000	1/4"	Brass	35	15	15	40.5
0634001	1/4"	Brass	35	15	25	79
0634009	1/4"	Stainless Steel	35	15	15	40.5
0634533	1/4"	Brass	35	75	63	63