


Walraven 2S Clamp Set

(B0533)

effortless installation: push into drill hole and twist

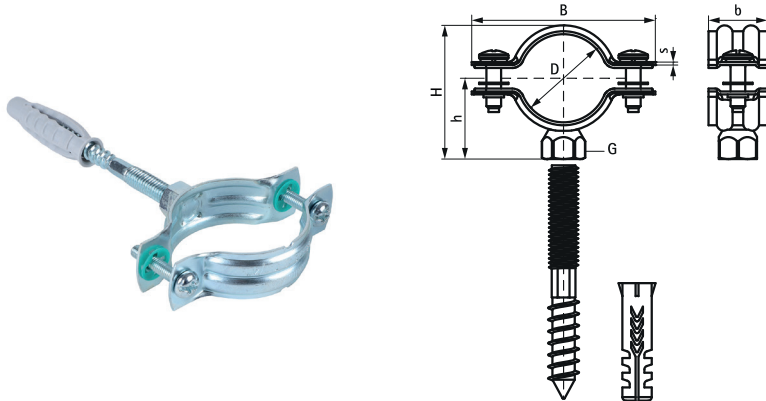

Features & benefits

- two-screw clamp
- gapless range
- anti-loss washers prevent screws from falling out during installation
- material: clamp and hanger bolt made of steel; plug made of PA (polyamide)
- zinc plated
- ≤DN80 Double thread screw M8x80; plug ø10x50
- >DN80 Double thread screw M10x80; plug ø12x60

Product Number	Outside Pipe Diameter	Connection Thread	Connection Height	Drill Hole Depth	Drill Hole Diameter	Drive Hexagon	Drive Torx	Material Thickness	Total Width x Total Height x Total Depth	Maximum Allowed Load Faz
Reference letter	D	G	Gh	h0	d0	SW	T	MT	W x H x DtT	Fa,z
Unit description	(mm)		(mm)	(mm)	(mm)			(mm)	(mm) x (mm) x (mm)	(N)
33215019	15 - 19	M8	50	50	10	6	25	1	51 x 133 x 20	700
33215024	20 - 24	M8	50	50	10	6	25	1	56 x 140 x 20	700
33215030	25 - 30	M8	50	50	10	6	25	1	62 x 147 x 20	700
33215037	31 - 37	M8	50	50	10	6	25	1	69 x 154 x 20	700
33215046	38 - 46	M8	50	50	10	6	25	1.25	78 x 163 x 20	850
33215052	47 - 52	M8	50	50	10	6	25	1.25	84 x 165 x 20	850
33215061	53 - 61	M8	50	50	10	6	25	1.25	93 x 174 x 20	850
33215067	62 - 67	M8	50	50	10	6	25	1.25	99 x 175 x 20	850
33215081	75 - 81	M8/M10	50	50	10	6	25	1.50	118 x 194 x 20	1400
33215095	88 - 95	M8/M10	50	50	10	6	25	2	136 x 209 x 23	2000
33215112	104 - 112	M8/M10	60	60	12	6	25	2	153 x 236 x 23	2000
33215118	113 - 118	M8/M10	60	60	12	6	25	2	153 x 242 x 23	2000
33215127	119 - 127	M8/M10	60	60	12	6	25	2	168 x 258 x 23	2000