


Walraven Heavy Duty Clamp HD500 (M8/10) (Black)

(B1040)

for steel and stainless steel pipes, including fire mains

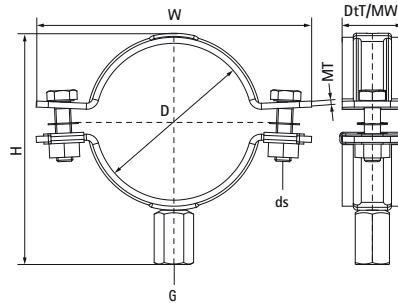

Features & benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washers
- with 360° CO2 welded connection nut
- suitable for fire mains (DIN1988-600)
- with M8/10 connection for higher flexibility
- can be used with stainless steel pipe; the epoxy powder coating prevents contact corrosion between clamp and pipe
- surface protection:
- black (RAL 9005) epoxy powder coating (60 µm)
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
3303B016	12 - 16	-	-	M8/M10	71.7 x 43 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B023	19 - 23	DN 15	1/2	M8/M10	78.5 x 50 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B026	22 - 26	-	-	M8/M10	81.5 x 53 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B030	25 - 30	DN 20	3/4	M8/M10	85 x 57 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B036	31 - 36	DN 25	1	M8/M10	90.5 x 63 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B042	37 - 42	-	-	M8/M10	97.6 x 69 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B052	47 - 52	DN 40	1 1/2	M8/M10	108.8 x 79 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B058	53 - 58	-	-	M8/M10	114 x 85 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100
3303B065	59 - 65	DN 50	2	M8/M10	120.8 x 92 x 32.3	30 x 2.5	M8	ITB (KOT)	2,100