


Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings

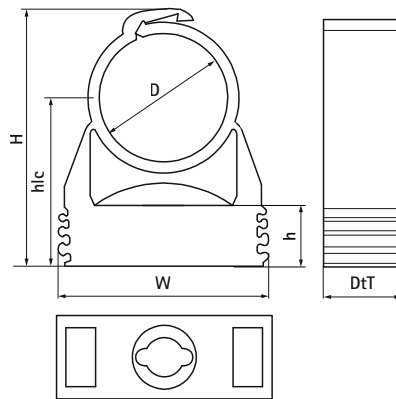

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Outside Pipe Diameter	Total Width x Total Height x Total Depth	Clamp Center Distance	Height	Connection Thread	Maximum Allowed Load $F_{a,z}$	Breaking Load $F_{b,z}$
Reference letter	D	W x H x DtT	hlc	h	G	$F_{a,z}$	$F_{b,z}$
Unit description	mm	mm x mm x mm	mm	mm		N	N
0854010	10 - 12	29 x 34 x 17	24	10.6	None	170	500
0854012	12 - 14	29 x 36 x 17	25	10.6	None	180	550
0854015	14 - 16	29 x 36 x 17	25	10.6	None	200	600
0854018	16 - 20	29 x 40 x 17	27	10.6	None	230	700
0854022	20 - 23	29 x 43 x 17	28	10.6	None	270	800
0854028	24 - 28	40 x 50 x 18	32	10.6	None	280	850
0854031	28 - 32	40 x 55 x 17	36	10.6	None	300	900
0854035	32 - 35	43 x 59 x 17	37	10.6	None	330	1,000
0854038	35 - 40	47 x 68 x 17	44	12.1	None	330	1,000
0854042	40 - 44	52 x 70 x 17	44	12.1	None	330	1,000
0854050	44 - 50	57 x 79 x 17	50	12.1	None	330	1,000
0854054	48 - 55	63 x 82 x 17	50	12.1	None	330	1,000
0854063	59 - 65	74 x 95 x 20	57	12.1	None	500	1,500