


Walraven starQuick® Clamp (Grey) - Ø 71 - 115 mm

(C0507)

for securing conduits and pipes to walls, floors, or ceilings

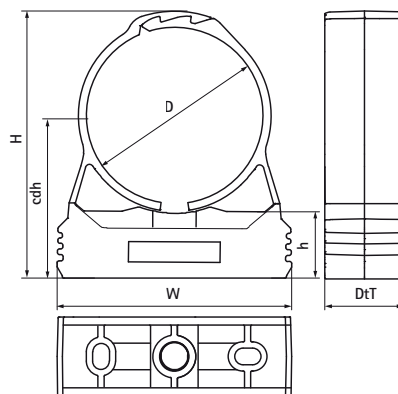

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe, use hands for full closing
- clamp can be mounted to wall, floor or ceiling by use of two bolts (outer slots) or by using a standard Walraven slide nut (middle hole) and screwing the clamp on a threaded rod
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	Outside Pipe Diameter	Total Width x Total Height x Total Depth	Clamp Center Distance	Height	Connection Thread	Maximum Allowed Load
Reference letter	D	W x H x DtT	hlc	h	G	Fa,z
Unit description	(mm)	(mm) x (mm) x (mm)	(mm)	(mm)		(N)
08541075	71 - 76	105 x 135 x 39	75	25.20	None	650
08541090	88 - 93	115 x 154 x 39	85	24.50	None	730
08541110	109 - 115	145 x 192 x 39	105	28.10	None	1200