


Walraven BISOFIX® E25

(D0326)

for insulated pipes

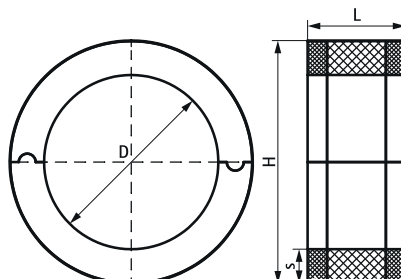

Features & benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 80\text{mm}$ = 80kg/m^3
- PIR density for $D \geq 80\text{mm}$ = 120kg/m^3
- temperature range $-45\text{ }^{\circ}\text{C}$ - $+105\text{ }^{\circ}\text{C}$



Product Number	Outside Pipe Diameter	Total Width x Total Height x Material Thickness Total Length		Operating Temperature	Maximum Allowed Load $F_{a,z}$
Reference letter	D	W x H x L	MT		$F_{a,z}$
Unit description	(mm)	(mm) x (mm) x (mm)	(mm)	(°C)	(N)
I250000012	12	62.60 x 62.60 x 50	25.30	-45 - 105	100
I250000015	15	66 x 66 x 50	25.30	-45 - 105	100
I250000018	17.20 - 18	68.60 x 68.60 x 50	25.30	-45 - 105	100
I250000022	21.30 - 22	75.40 x 75.40 x 50	26.70	-45 - 105	100
I250000028	26.90 - 28	78.60 x 78.60 x 50	25.30	-45 - 105	100
I250000035	33.70 - 35	88 x 88 x 50	26.50	-45 - 105	100
I250000042	42.40	100 x 100 x 50	28.80	-45 - 105	150
I250000048	48.30	100.10 x 100.10 x 50	25.90	-45 - 105	225
I250000054	54	104.60 x 104.60 x 50	25.30	-45 - 105	225
I250000057	57	107.60 x 107.60 x 50	25.30	-45 - 105	225
I250000060	60.30	110.90 x 110.90 x 50	25.30	-45 - 105	350
I250000064	64	128.60 x 128.60 x 50	32.30	-45 - 105	350
I250000070	70	134.60 x 134.60 x 50	32.30	-45 - 105	425
I250000076	76.10	140.70 x 140.70 x 50	32.30	-45 - 105	575
I250000089	88.90	153.50 x 153.50 x 50	32.30	-45 - 105	875
I250000102	101.60	166.20 x 166.20 x 50	32.30	-45 - 105	1000
I250000108	108	176 x 176 x 50	34	-45 - 105	1075
I250000114	114.30	178.90 x 178.90 x 50	32.30	-45 - 105	1250
I250000133	133	197.60 x 197.60 x 100	32.30	-45 - 105	1475
I250000140	139.70	205.10 x 205.10 x 100	32.70	-45 - 105	1700
I250000160	159 - 160	224.60 x 224.60 x 100	32.30	-45 - 105	1950
I250000168	168.30	232.90 x 232.90 x 100	32.30	-45 - 105	2125
I250000219	219.10	283.70 x 283.70 x 100	32.30	-45 - 105	3525
I250000356	356	406 x 406 x 100	32	-45 - 105	