


Walraven BISOFIX® E32

(D0338)

for insulated pipes

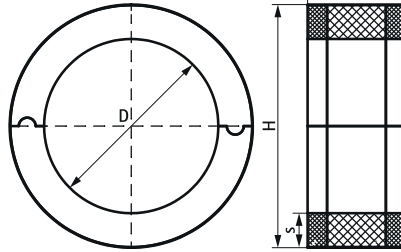

Features & benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 80\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 80\text{mm} = 120\text{kg/m}^3$
- temperature range $-45\text{ }^\circ\text{C} - +105\text{ }^\circ\text{C}$



Product Number	Outside Pipe Diameter	Total Width x Total Height x Material Thickness Total Length	Operating Temperature	Maximum Allowed Load $F_{a,z}$	
Reference letter	D	W x H x L	MT	$F_{a,z}$	
Unit description	(mm)	(mm) x (mm) x (mm)	(mm)	(N)	
			(CEL)		
I32000012	12	76.60 x 76.60 x 50	32.30	-45 - 105	100
I32000015	15	80 x 80 x 50	32.50	-45 - 105	100
I32000018	17.20 - 18	82.60 x 82.60 x 50	32.30	-45 - 105	100
I32000022	21.30 - 22	88 x 88 x 50	33	-45 - 105	100
I32000028	26.90 - 28	100 x 100 x 50	36	-45 - 105	100
I32000035	33.70 - 35	100 x 100 x 50	32.50	-45 - 105	100
I32000042	42.40	108 x 108 x 50	32.80	-45 - 105	150
I32000048	48.30	112.90 x 112.90 x 50	32.30	-45 - 105	225
I32000054	54	124.60 x 124.60 x 50	35.30	-45 - 105	225
I32000060	60.30	124.90 x 124.90 x 50	32.30	-45 - 105	350
I32000064	64	152 x 152 x 50	44	-45 - 105	350
I32000070	70	152 x 152 x 50	41	-45 - 105	425
I32000076	76.10	156.70 x 156.70 x 50	40.30	-45 - 105	575
I32000089	88.90	176.10 x 176.10 x 50	43.55	-45 - 105	875
I32000102	101.60	192 x 192 x 50	45.20	-45 - 105	1000
I32000108	108	192 x 192 x 50	42	-45 - 105	1075
I32000114	114.30	194.90 x 194.90 x 50	40.30	-45 - 105	1250
I32000133	133	218.40 x 218.40 x 100	42.70	-45 - 105	1475
I32000140	139.70	220.30 x 220.30 x 100	40.30	-45 - 105	1700
I32000160	159 - 160	241 x 241 x 100	40.50	-45 - 105	1950
I32000168	168.30	248.90 x 248.90 x 100	40.30	-45 - 105	2125
I32000219	219.10	315.10 x 315.10 x 100	48	-45 - 105	3525
I32000273	273.10	353.60 x 353.60 x 100	40.30	-45 - 105	4925