
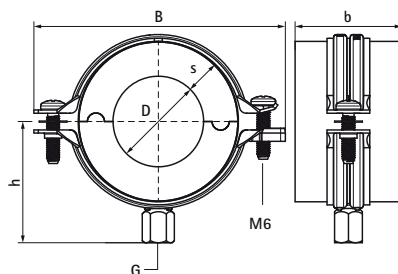


Walraven BISOFIX® E13 (M8/M10)

(D0505)

for insulated pipes



Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven Bifix® G2 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)			(mm) x (mm) x (mm)	(mm)	(N)
2210010	10		M8/M10	80 x 59 x 50	13	100
2210012	12		M8/M10	80 x 62 x 50	13.30	100
2210015	16		M8/M10	80 x 63 x 50	13.30	100
2210017	18	DN 10	M8/M10	91 x 70 x 50	13.30	100
2210021	22	DN 15	M8/M10	97 x 74 x 50	13.50	100
2210027	28	DN 20	M8/M10	97 x 81 x 50	13.30	100
2210035	35	DN 25	M8/M10	110 x 91 x 50	16.30	100
2210042	42	DN 32	M8/M10	118 x 98 x 50	16.30	150
2210048	48	DN 40	M8/M10	125 x 103 x 50	16	225
2210054	54		M8/M10	134 x 112 x 50	13.30	225
2210060	60	DN 50	M8/M10	142 x 119 x 50	17.30	350
2210064	64		M8/M10	142 x 123 x 50	16.30	350
2210076	76	DN 65	M8/M10	155 x 136 x 50	17.20	575
2210089	89	DN 80	M8/M10	172 x 149 x 50	17.60	875