


Walraven BISOFIX® E19 (M8/M10)

(D0510)

for insulated pipes

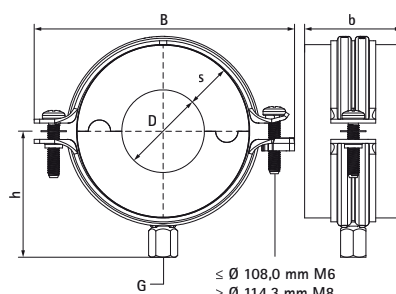

Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven Bifix® G2 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Product Number	Outside Pipe Diameter	Pipe Diameter Imperial	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)	(in)			(mm) x (mm) x (mm)	(mm)	(N)
2211012	12			M8/M10	91 x 72 x 50	19.50	100
2211015	16			M8/M10	97 x 75 x 50	19.50	100
2211017	18	5/8	DN 10	M8/M10	97 x 80 x 50	20.90	100
2211021	22	1/2	DN 15	M8/M10	110 x 89 x 50	22.80	100
2211027	28	3/4	DN 20	M8/M10	118 x 95 x 50	23	100
2211035	35		DN 25	M8/M10	125 x 102 x 50	22.50	100
2211042	42	1 1/4	DN 32	M8/M10	134 x 113 x 50	23.30	150
2211048	48	1 1/2	DN 40	M8/M10	142 x 119 x 50	23.30	225
2211054	54			M8/M10	148 x 125 x 50	23.50	225
2211060	60	2	DN 50	M8/M10	155 x 131 x 50	23.30	350
2211064	64			M8/M10	155 x 135 x 50	23.50	350
2211070	70			M8/M10	164 x 143 x 50	24.50	425
2211076	76		DN 65	M8/M10	172 x 150 x 50	24.50	575
2211089	89	3	DN 80	M8/M10	181 x 162 x 50	24.50	875
2211108	108			M8/M10	209 x 187 x 50	27.10	1075
2211114	114	4	DN 100	M8/M10	217 x 196 x 50	26.30	1250
2211133	133			M8/M10	238 x 216 x 50	26.30	1475
2211140	140	5	DN 125	M8/M10	50 x 204 x 233	26.40	1700
2211159	159			M8/M10	275 x 246 x 50	29.60	1950
2211168	168	6	DN 150	M8/M10	50 x 229 x 256	21.30	2125