


Walraven BISOFIX® E32 (M8/10)

(D0513)

for insulated pipes

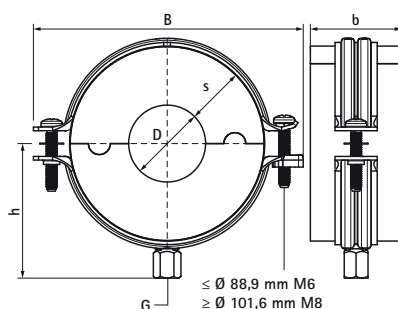

Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven Bifix® G2 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Product Number	Outside Pipe Diameter	DN	Connection Thread	Total Width x Total Height x Total Length	Insulation Thickness	Maximum Allowed Load Faz
Reference letter	D	D	G	W x H x L	Is	Fa,z
Unit description	(mm)			(mm) x (mm) x (mm)	(mm)	(N)
22115012	12		M8/M10	118 x 98 x 50	31.70	100
22115015	16		M8/M10	125 x 102 x 50	32	100
22115018	18		M8/M10	125 x 102 x 50	30.20	100
22115022	22		M8/M10	134 x 111 x 50	32	100
22115028	28		M8/M10	142 x 123 x 50	35	100
22115035	35	DN 25	M8/M10	155 x 134 x 50	37	100
22115042	42	DN 32	M8/M10	148 x 131 x 50	32	150
22115054	54		M8/M10	164 x 143 x 50	32	225
22115060	60	DN 50	M8/M10	172 x 149 x 50	32.30	350
22115064	64		M8/M10	172 x 155 x 50	33	350
22115076	76	DN 65	M8/M10	189 x 168 x 50	33.70	575
22115089	89	DN 80	M8/M10	201 x 179 x 50	32.20	875
22115114	114	DN 100	M8/M10	229 x 209 x 50	33.70	1250