


Walraven BISOFIX® E19 + Cold Block s1s2

(D05141)

for insulated pipes

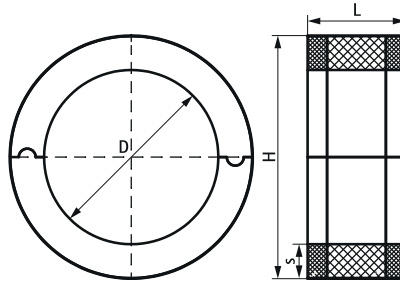

Features & benefits

- pipe clamp with insulation shell
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- to combine with Bifix® G2 without lining and HD500 Clamps
- effective prevention of corrosion
- reduced smoke development in case of fire by intumescent sheet
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with intumescent and self-adhesive INCERAM cladding for easy closure of the pipe support
- PIR density 80 / 120 kg / m³
- does not contain CFC, HCFC, formaldehyde or cadmium
- excellent thermal, mechanical and smoke reducing properties
- Storage and processing temperature $\geq +10\text{ }^{\circ}\text{C}$
- building material / Euro class according to DIN EN 13501-1 BL-s1, d0 or BL-s2, d0
- application temperature from $-50\text{ }^{\circ}\text{C}$ to $+110\text{ }^{\circ}\text{C}$

Product Number	Outside Pipe Diameter	Total Width x Total Height x Material Thickness Total Length		Operating Temperature	Maximum Allowed Load Faz
Reference letter	D	W x H x L	MT		Fa,z
Unit description	(mm)	(mm) x (mm) x (mm)	(mm)	(°C)	(N)
220200171	17.20 - 18	56 x 56 x 50	19	-50 - 110	100
220200211	21.30 - 22	60 x 60 x 50	19	-50 - 110	100
220200271	26.90 - 28	66 x 66 x 50	19	-50 - 110	100
220200351	35	73 x 73 x 50	19	-50 - 110	100
220200421	42.40	80 x 80 x 50	19	-50 - 110	150
220200481	48.30	86 x 86 x 50	19	-50 - 110	225
220200541	54	92 x 92 x 50	19	-50 - 110	225
220200601	60.30	98 x 98 x 50	19	-50 - 110	350
220200761	76.10	116 x 116 x 50	19	-50 - 110	575
220200891	88.90	129 x 129 x 50	19	-50 - 110	875
220201141	114.30	156 x 156 x 50	19	-50 - 110	1250
220201401	140	182 x 182 x 100	19	-50 - 110	1700
220201681	168	208 x 208 x 100	19	-50 - 110	2125
220202191	219.10	259 x 259 x 100	19	-50 - 110	3525